




Features & Benefits

- Easy installation matching common mechanical water heater fittings
- 5.9 Star (NG) 5.8 Star (Propane)
- 16 L/min continuous hot water delivery @ 25°C rise
- Electronic temperature control
- Overheat protection
- No electrical connection required
- Available in natural and propane
- Heat shield available - 299880
- 10 year heat exchanger warranty¹

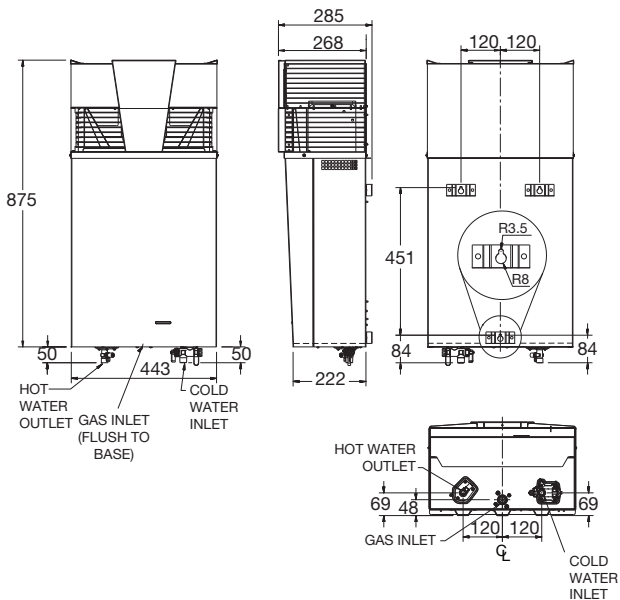

| MODEL | 834016 |
|----------------------------------|-------------|
| Min. Operating Flow rate (L/min) | 3.0 |
| Nom. Gas Consumption (MJ/hr) | 128 Natural |
| Nom. Gas Consumption (MJ/hr) | 125 Propane |
| Max Water Supply Pressure (kPa) | 800 |
| Min Water Supply Pressure (kPa) | 140 |
| Water Connections | R 1/2 |
| Gas Connection | Rp 3/4 |
| Approx. Weight (Empty) kg | 25 |



Scan code for details & installation instructions

