


### Features & Benefits

- Easy installation matching common mechanical water heater fittings
- 5.9 Star (NG) 5.8 Star (Propane)
- 16 L/min continuous hot water delivery @ 25°C rise
- Electronic temperature control
- Overheat protection
- No electrical connection required
- Available in natural and propane
- Heat shield available - 299880
- 10 year heat exchanger warranty<sup>1</sup>



MODEL	834016
Min. Operating Flow rate (L/min)	3.0
Nom. Gas Consumption (MJ/hr)	128 Natural
Nom. Gas Consumption (MJ/hr)	125 Propane
Max Water Supply Pressure (kPa)	800
Min Water Supply Pressure (kPa)	140
Water Connections	R 1/2
Gas Connection	Rp 3/4
Approx. Weight (Empty) kg	25

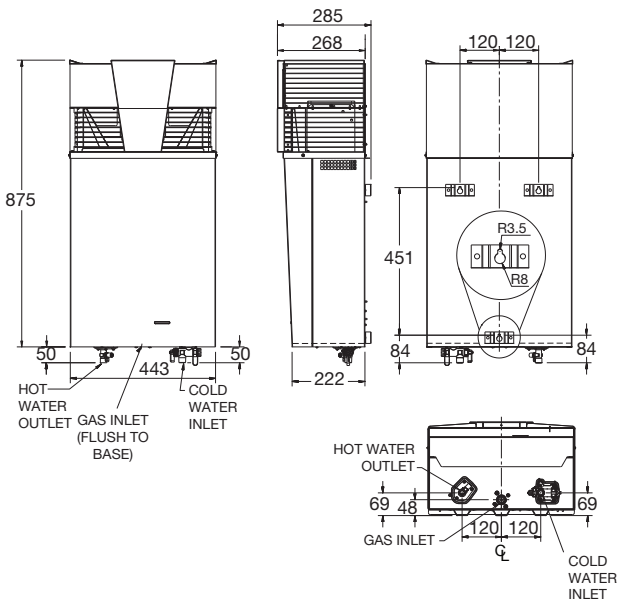

Scan code for details & installation instructions

